




1. Turn off the general switch




2. Align, mark, drill holes & Apply the screws




3. Connect the wires & Make sure the DC plug is exposed

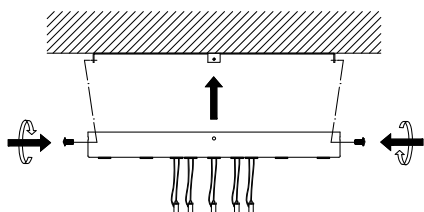

4. Apply the side screws & Make sure the DC plug is exposed



5. By rotating apply the Hanging element



6. Turn on the general switch

1. This light fitting operates at a normal supply Voltage of 230V.
2. When changing the bulb or fuses, always switch off At the mains & allow the old bulb to cool down Before handling.

