

# NOVA LUCE


## PRODUCT DATASHEET

Version: 001

### PRODUCT PHOTOGRAPH



### TECHNICAL DRAWING

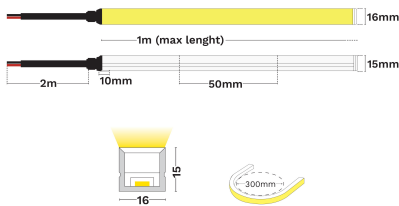

### COMPATIBLE WITH

— On/Off Driver: N/A

— Triac Driver: N/A

— Dali Driver: N/A

### GENERAL INFORMATION

|                         |            |
|-------------------------|------------|
| Product Code            | 9540035    |
| Product Category        | Neon Flex  |
| Product Family          | Gomu 16X15 |
| Mounting Location       | N/A        |
| Application Environment | Outdoor    |

### DIMENSION & WEIGHT

|              |               |
|--------------|---------------|
| LxWxH (cm)   | L:1m 16x15 mm |
| Cut out (cm) | N/A           |
| Weight (Kgr) | N/A           |

### MATERIAL & COLOR

|                |          |
|----------------|----------|
| Product Color  | N/A      |
| Body Material  | Silicone |
| Cover Material | N/A      |

### APPLICATION & MOUNTING

|                            |            |
|----------------------------|------------|
| Ambient Working Temp.      | 45 C       |
| Type of Protection         | IP68       |
| Protection Class IK        | IK08       |
| Dimmable                   | Yes        |
| Type of Dimming (Optional) | Triac/Dali |
| Mounting type              | N/A        |
| Mounting Depth (cm)        | N/A        |
| Led Module Replaceable     | No         |
| Light Source               | Led        |
| Adjustable                 | No         |

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com



# NOVA LUCE

## PRODUCT DATASHEET

Version: 001

### ELECTRICAL DATA

|                         |                |
|-------------------------|----------------|
| Power (Nominal)         | <b>10</b>      |
| Input voltage (Nominal) | <b>24Vdc</b>   |
| Mains Frequency         | <b>50/60Hz</b> |
| Output voltage          | <b>N/A</b>     |
| Output Current          | <b>N/A</b>     |
| Power Factor            | <b>N/A</b>     |
| Efficiency              | <b>N/A</b>     |
| SVM                     | <b>N/A</b>     |
| Pst                     | <b>N/A</b>     |
| Class                   | <b>III</b>     |

### PHOTOMETRICAL DATA

|                           |                   |
|---------------------------|-------------------|
| Luminous Flux             | <b>530</b>        |
| Luminous Efficacy         | <b>50.9</b>       |
| Color Temperature         | <b>3000</b>       |
| Light Color (Designation) | <b>Warm White</b> |
| CRI                       | <b>94</b>         |
| SDCM                      | <b>&lt;3</b>      |
| Beam Angle                | <b>120</b>        |
| UGR                       | <b>N/A</b>        |

### LIFESPAN

|          |                  |
|----------|------------------|
| Lifetime | <b>&gt;54000</b> |
|----------|------------------|

### CERTIFICATES

|              |                 |
|--------------|-----------------|
| Certificates | <b>CE, UKCA</b> |
|--------------|-----------------|

### WARRANTY

|          |                |
|----------|----------------|
| Warranty | <b>5 years</b> |
|----------|----------------|

### LIGHT DISTRIBUTION

NOVA LUCE S.A

Schimatari Viotias  
32009, Greece

+30 22620 58 121  
+30 22620 56 743

info@novaluce.com  
www.novaluce.com

